




Product Name: Split access controller

Product Type: JPC-120

Features:

- With 3 bi-color LED indicators.
- With a beep.
- Provide 2 D/I contacts for controlling door bolt and sensor.
- With a Wiegand input.
- With a RS232 interface.
- With ISP for upgrading firmware.
- With 2 relay output. (4 relay output is optional.)
- 16 D/I input is optional.
- A RS485 interface is optional.
- Memory with 15,000 card capacity is optional.
- A DIP switch for setting card reader ID from 1 to 512 is optional.

DIAGRAM :

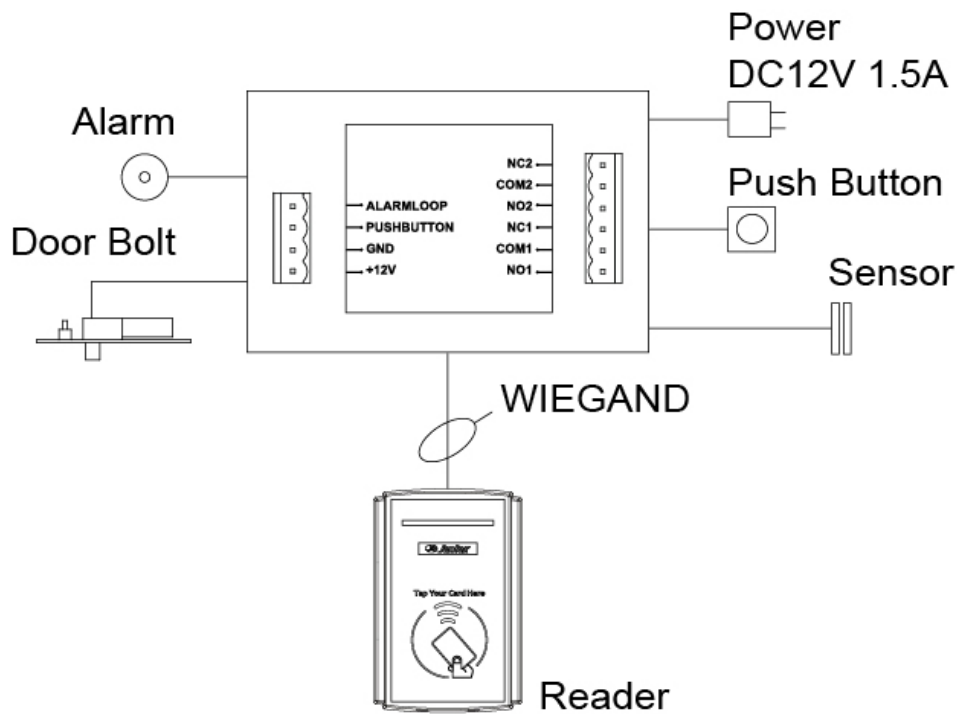


Specifications:

Power	DC 12V 1.5A
Relay	2 relays Max DC12V 1A
Humidity	20% ~ 90%
Operation Temperature	0 ~ 50
Dimension /mm	96.5 (L) X 50 (W) X 31.6 (H)

Ordering Information:

EX: JPC-120-I refers to JPC-120 controller with optional function

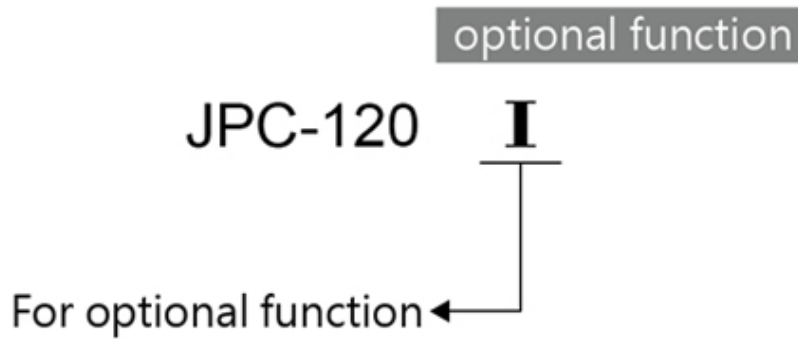

Reference models:

Taiwan Jantek Electronics., Ltd.

[www.jantek.com.tw](http://www.jantek.com.tw)

Add:6F-1, No. 1, Wuquan 1St.Rd.,Xinzhuang District, TEL : 886-2-22991255

New Taipei City 24892, Taiwan, R.O.C.

FAX : 02-2299-1257 / 02-2299-7412

Email : [service@jantek.com.tw](mailto:service@jantek.com.tw)