

Product Name: Long Range Parking
Reader Controller


Product Type: JST-520

Features:

- .Standalone or PC on line through the software
- .Support 10,000 history transaction
- .Card capacity is 10,000 cards
- .Built-in RS-232/RS-485 interface
- .Built-in TCP/IP for Intranet or Internet network (Option device)
- .Built-in Watch Dog feature
- .8 Programmable time zones, 3 schedules per time zone
- .Built-in clock and calendar
- .Control 2 Long Range Reader to control Vehicle entry and Exit
- .Data is protected even after power failure
- .Provides two DI point for Vehicle proximity Coil or Infrared device,
- .Provides three Relay output
- .With Anti-Pass Back feature


JST-520 Controller + UHF Reader Diagram

VE-20140724-02

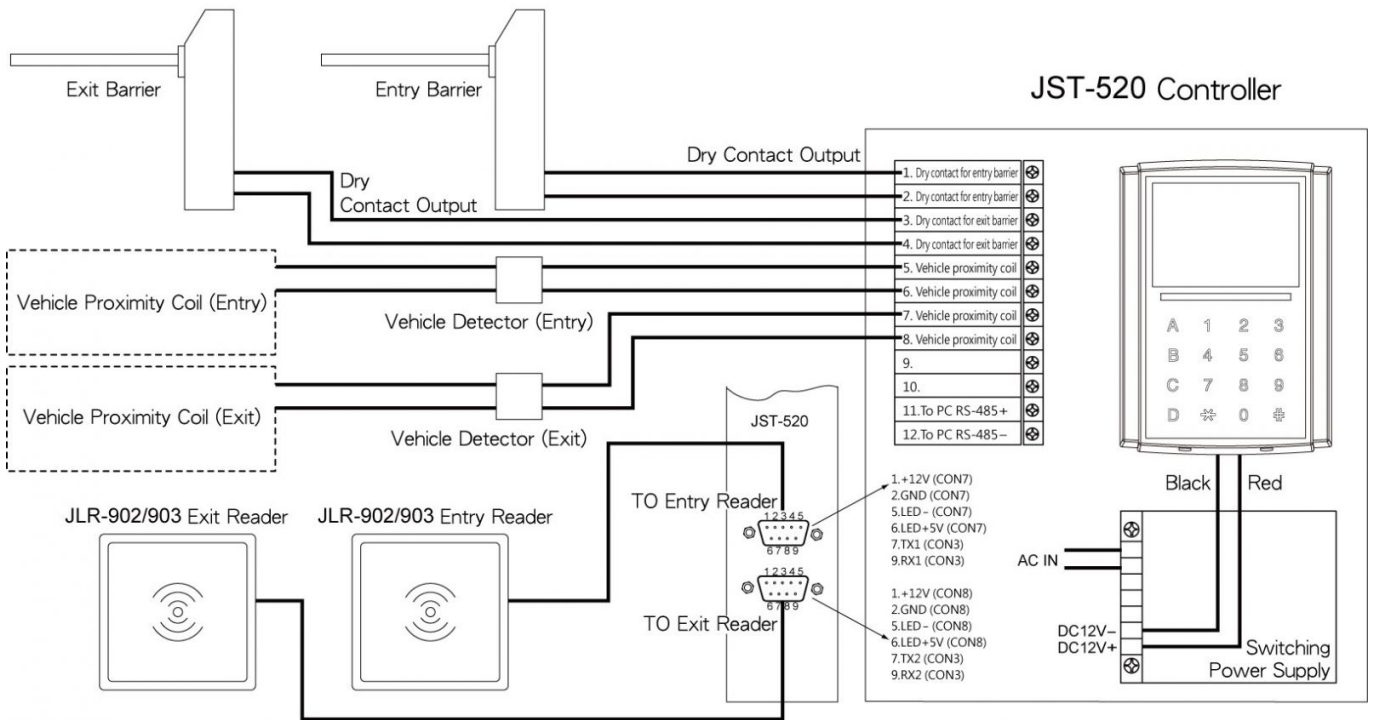

JST-520 + UHF Long Range Reader Configuration

VE20140724-03

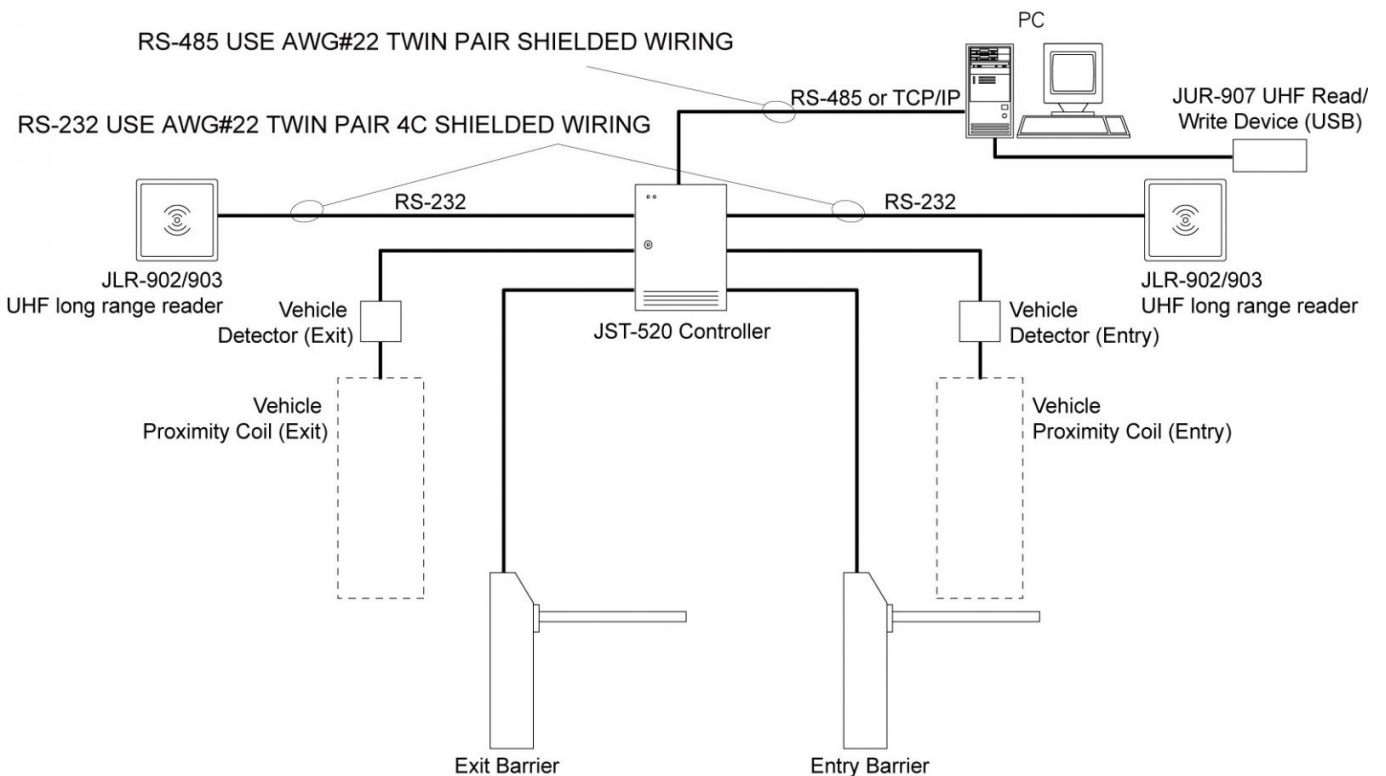

Specifications:

Specification	
Keypad :	4 x 4 16 Keys Touch Keypad (Blue Backlight LED)
Power :	AC 110VAC ~ AC 220VAC
LCD :	160 x 80 Dot (Blue Backlight LCD)
Dimension :	290(L) x 240(W) x 78(H)mm
Relay :	4 Relay Contact (Max. DC 12V 1A)
Communication Interface :	Provides 2 * RS232, 1 * RS485 or TCP/IP module (option device)
working environment :	Humidity : 20% - 90%
	Operating Temperature : 0 ° C ~ 50 ° C

Ordering Information:

JST-520 R - RS-485

JST-520 T - TCP/IP

Reference models:

JLR-902 Integrated UHF Reader

JLR-903 Mid-distance UHF Integrated Reader

Taiwan Jantek Electronics., Ltd.

www.jantek.com.tw

Add:6F-1, No. 1, Wuquan 1St.Rd.,Xinzhuang District, TEL : 886-2-22991255

New Taipei City 24892, Taiwan, R.O.C.

FAX : 02-2299-1257 / 02-2299-7412

Email : service@jantek.com.tw